



Hardened & Ground Precision Grinding Vice

Series AA-480

- Precision grinding vice is used for light machining, grinding & inspection of precision components.
- All sides are grounded having accuracy for parallelism, flatness & squareness within ± 0.005 mm up till Cat No.AA-4803. For Cat No.AA-4804 the accuracy is ± 0.010 mm.
- Manufactured from high grade oil hardening steel, hardened & tempered to ensure stability & accuracy throughout the unit's working life.

Specifications:

Sr. No.	Cat. No.	Size in mm L X W X H	Jaw Opening (Q) in mm	Height of Jaw (M) in mm
1	AA-4801	150 x 48 x 60	0-75	30
2	AA-4802	180 x 63 x 70	0-90	35
3	AA-4803	200 x 73 x 80	0-100	40
4	AA-4804	235 x 96 x 96	0-125	48

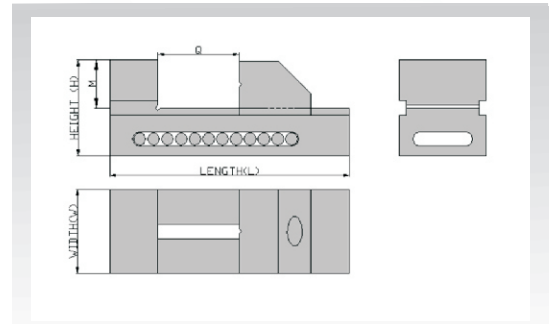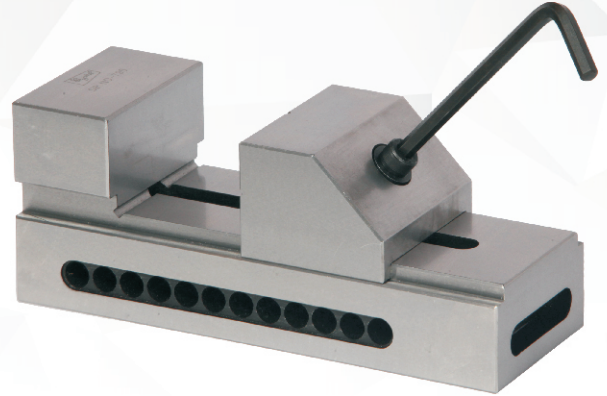

Hardened & Ground Precision Grinding Vice with Screw

Series AA-481

- All sides are grounded having accuracy for parallelism, flatness & squareness within ± 0.005 mm up till Cat No.AA-4813. For Cat No.AA-4814 the accuracy is ± 0.010 mm.
- Manufactured from high grade oil hardening steel, hardened & tempered to ensure stability & accuracy throughout the unit's working life.
- This vice is provided with a clamping screw having square thread & a gun metal bush.

Specifications:

Sr. No.	Cat. No.	Size in mm L X W X H	Jaw Opening (Q) in mm	Height of Jaw (M) in mm
1	AA-4811	150 x 48 x 60	0-75	30
2	AA-4812	180 x 63 x 70	0-90	40
3	AA-4813	200 x 73 x 80	0-100	45
4	AA-4814	235 x 96 x 96	0-125	56

